




# LOAD PERFORMANCE PARAMETERS

## 负载性能参数

# CM-X6-SE

以上数据为好盈实验室于室温 25℃、海平面高度，变化油门输入调节测得，电机温度为65%油门运行10分钟数据，仅供参考。  
 The above data is measured by HobbyWing laboratory at room temperature 25℃, sea level, change the throttle input adjustment, the motor temperature is 65% and the throttle runs for 10 minutes, for reference only.

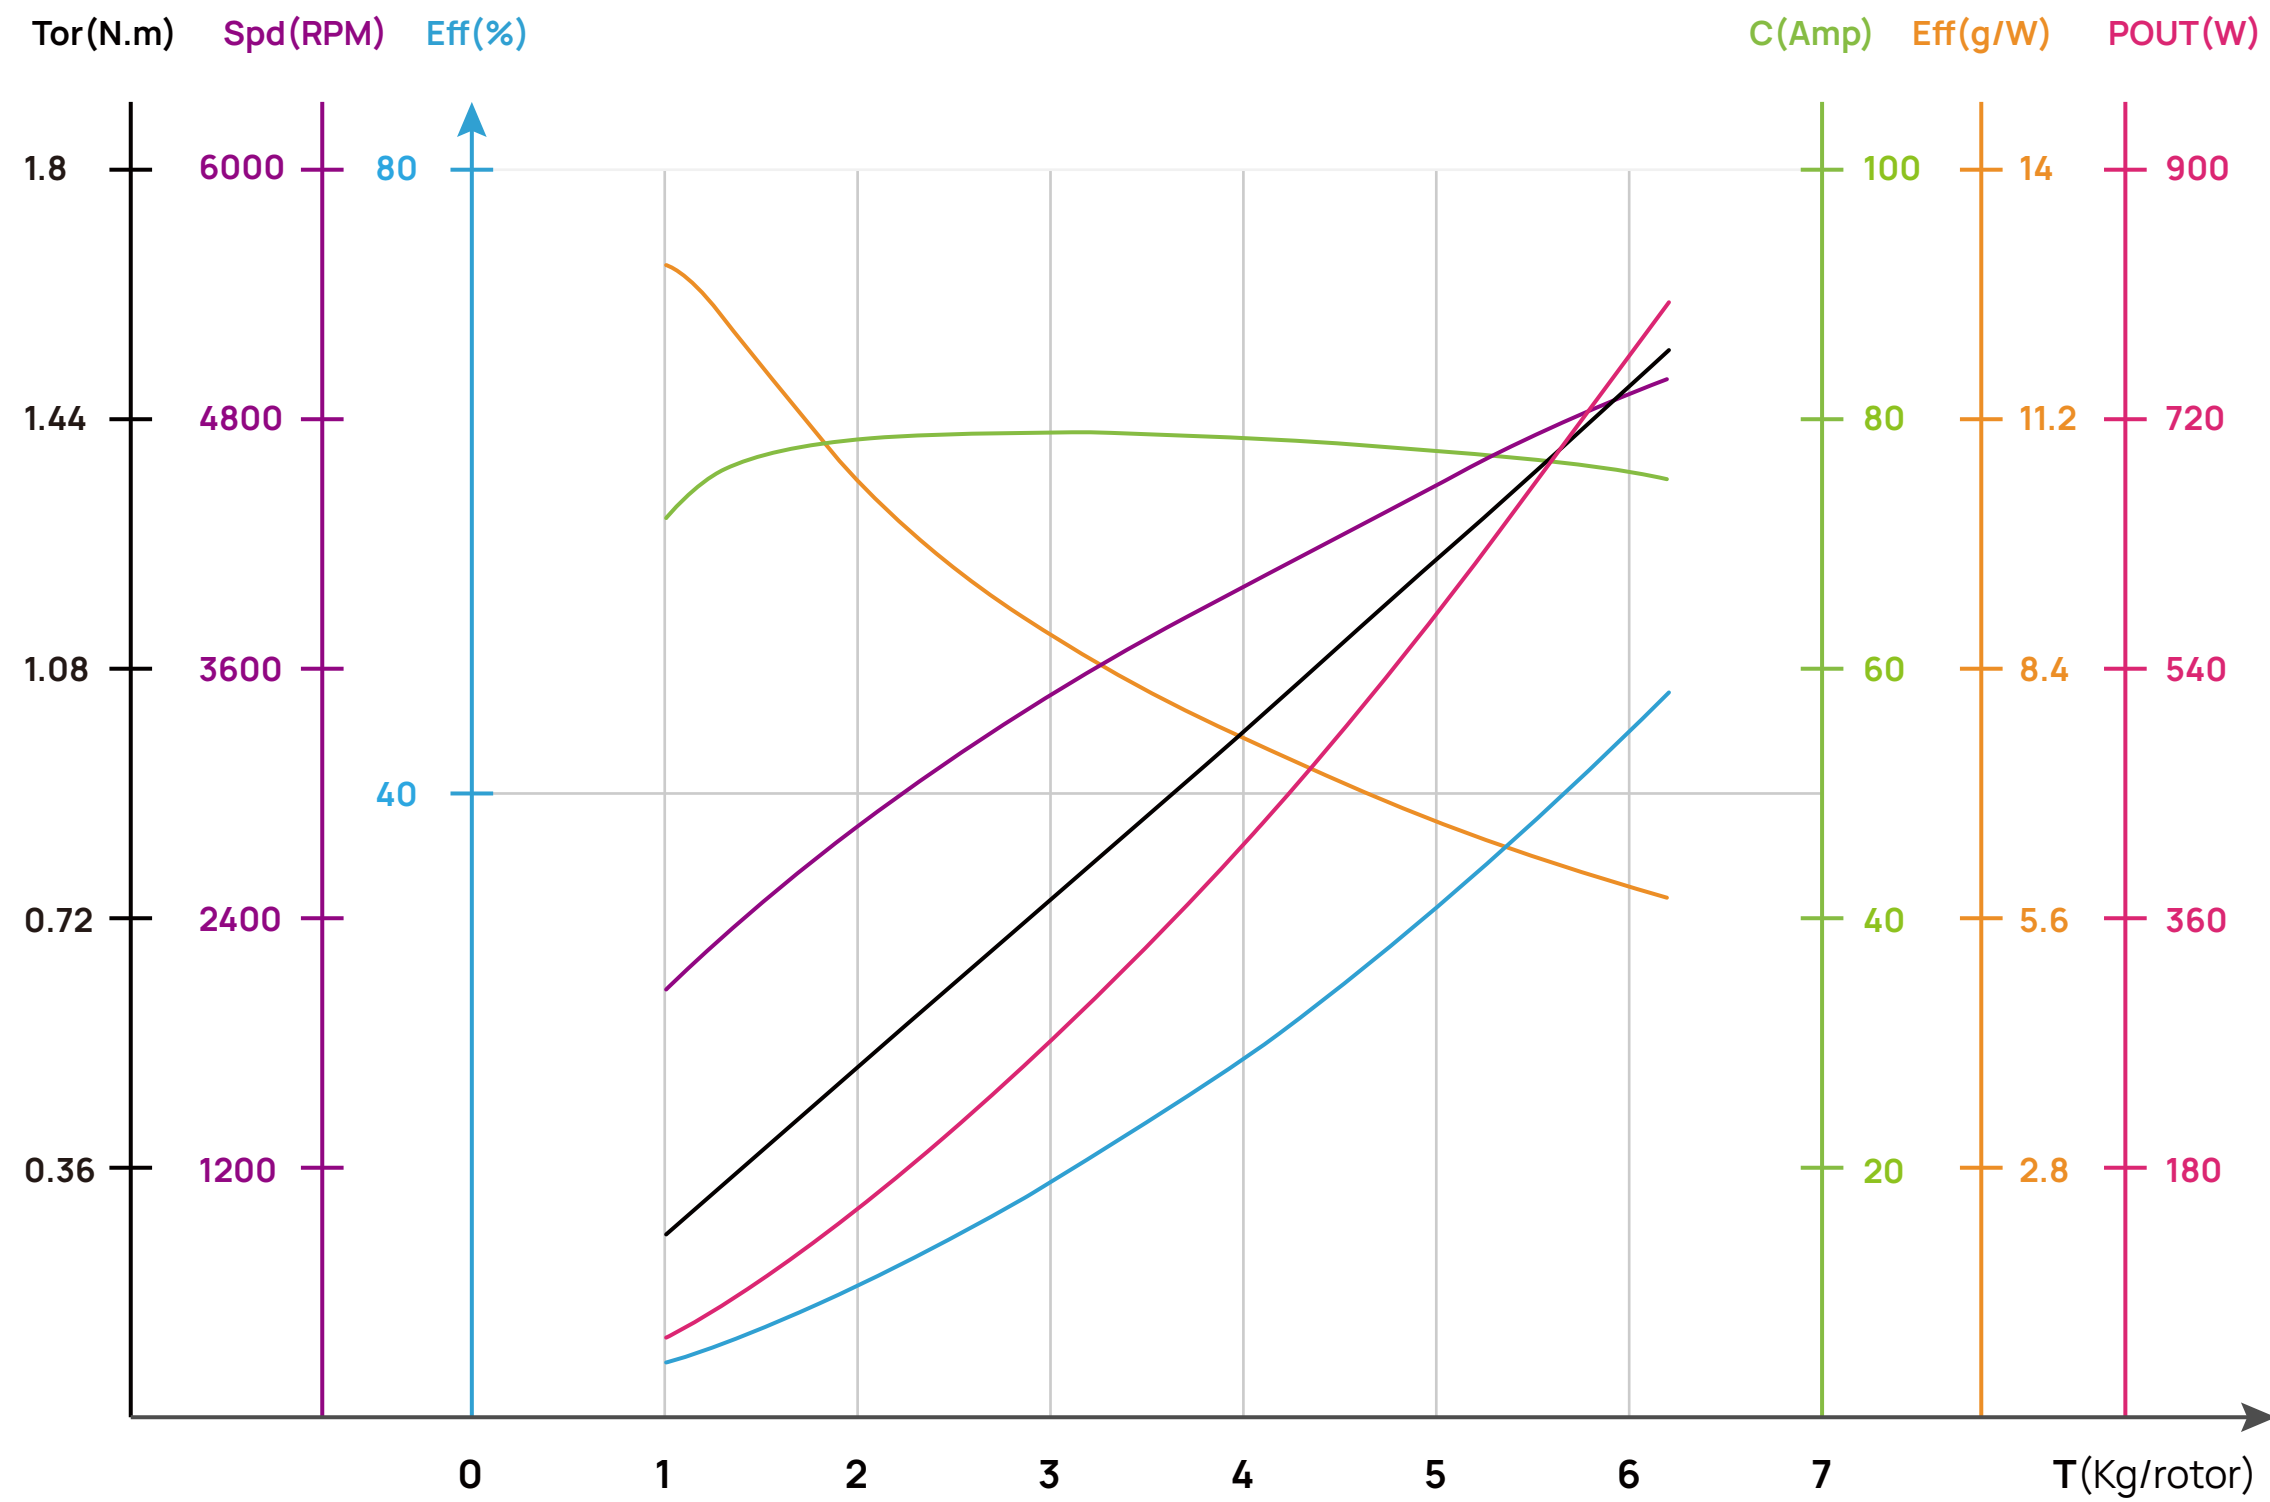

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Temperature(°C) 电机机壳温度
23V (6S LIPO)	22*7.0"	33%	1076	3.6	83.8	2105	12.8	0.28	72°C
		35%	1209	4.2	96.1	2220	12.6	0.31	
		37%	1351	4.8	110.7	2340	12.2	0.34	
		39%	1500	5.5	127.2	2461	11.8	0.38	
		42%	1733	6.7	155.3	2642	11.2	0.44	
		45%	1974	8.1	186.8	2819	10.6	0.50	
		48%	2219	9.6	221.0	2988	10.0	0.55	
		51%	2467	11.2	257.6	3149	9.6	0.62	
		54%	2717	12.9	296.3	3301	9.2	0.68	
		57%	2969	14.6	337.2	3447	8.8	0.74	
		60%	3223	16.5	380.3	3588	8.5	0.80	
		63%	3480	18.5	425.9	3724	8.2	0.86	
		66%	3740	20.6	474.3	3858	7.9	0.92	
		69%	4003	22.8	526.0	3990	7.6	0.99	
		72%	4269	25.2	581.2	4122	7.3	1.05	
		75%	4538	27.8	640.0	4254	7.1	1.12	
		78%	4807	30.5	701.9	4385	6.8	1.19	
		81%	5073	33.3	766.4	4513	6.6	1.25	
84%	5331	36.1	832.0	4634	6.4	1.32			
87%	5577	38.9	896.5	4746	6.2	1.38			
90%	5800	41.6	956.9	4842	6.1	1.44			
100%	6207	46.4	1069.1	4996	5.8	1.54			