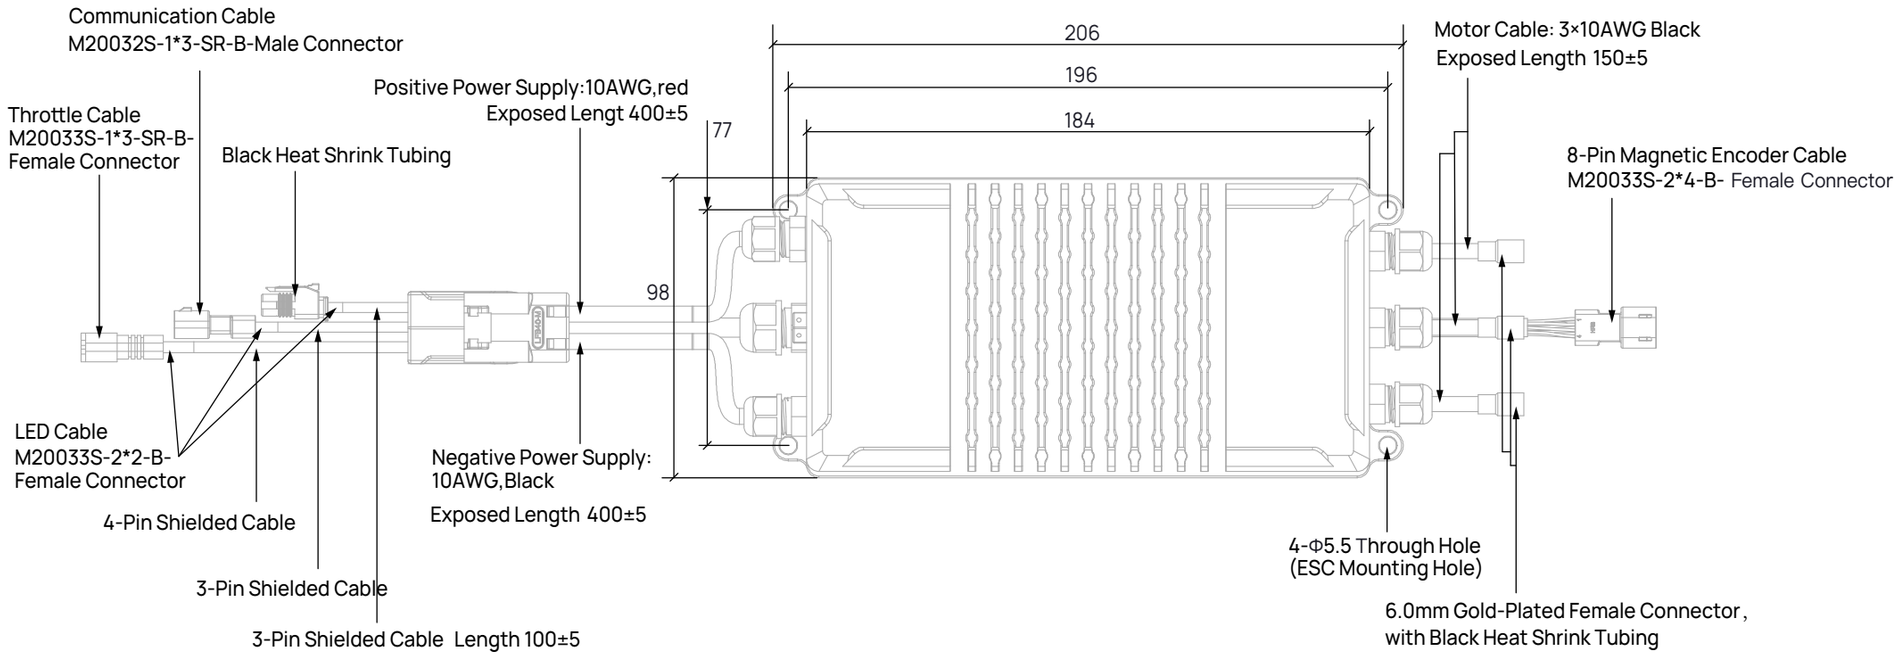
Communication Cable
M20032S-1*3-SR-B-Male Connector
Throttle Cable
M20033S-1*3-SR-B-
Female Connector
Black Heat Shrink Tubing
Positive Power Supply:10AWG,red
Exposed Lengt 400±5
206
196
184
77
98
Motor Cable: 3×10AWG Black
Exposed Length 150±5
8-Pin Magnetic Encoder Cable
M20033S-2*4-B- Female Connector
LED Cable
M20033S-2*2-B-
Female Connector
4-Pin Shielded Cable
3-Pin Shielded Cable
3-Pin Shielded Cable Length 100±5
Negative Power Supply:
10AWG,Black
Exposed Length 400±5
4-Φ5.5 Through Hole
(ESC Mounting Hole)
6.0mm Gold-Plated Female Connector,
with Black Heat Shrink Tubing

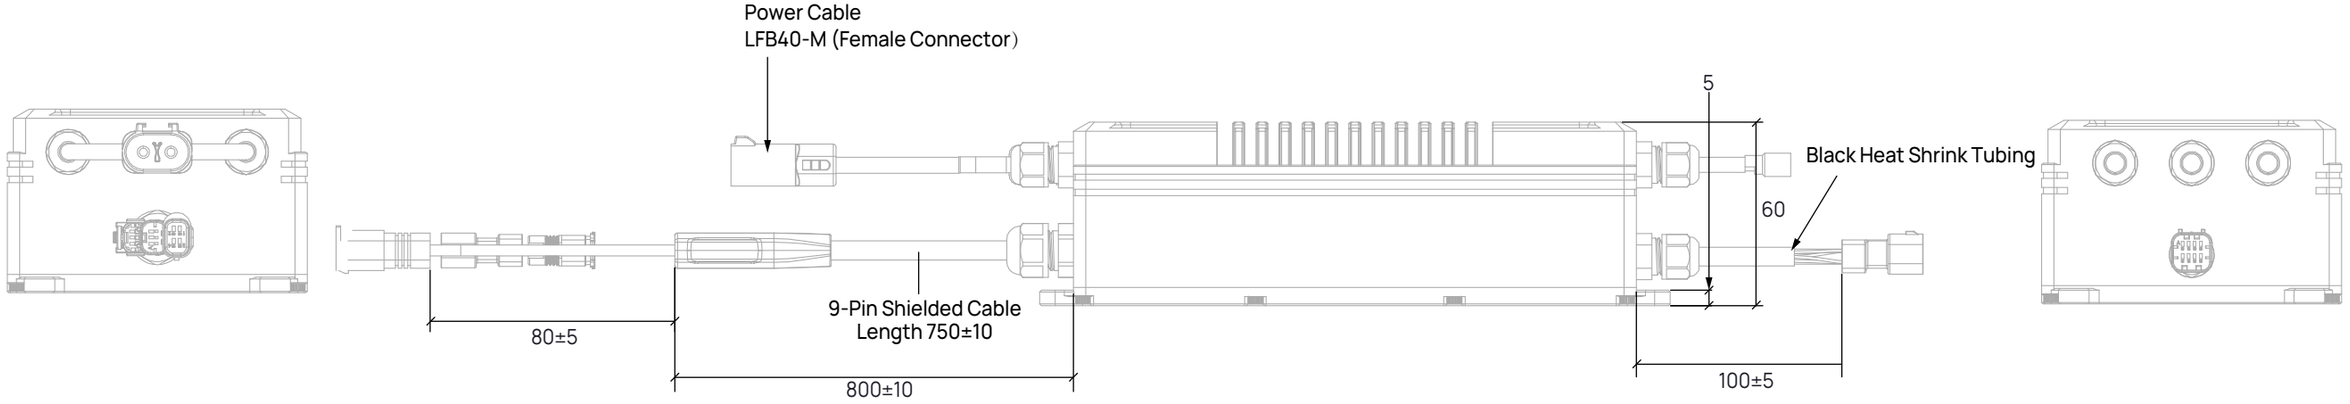
Power Cable
LFB40-M (Female Connector)
5
60
Black Heat Shrink Tubing
9-Pin Shielded Cable
Length 750±10
80±5
800±10
100±5