



LOAD PERFORMANCE PARAMETERS


负载性能参数

以下数据为室温 25°C、海平面高度的环境下，变化油门输入调节拉力测得。电机温度为65%油门下电机运行10分钟温度。

Under the environment of sea level altitude, the data above is measured in room temperature of 25°C.


The throttle input is able to adjust the tension, and the motor temperature is the temperature of the rated throttle running for 10 minutes.

330KV+MP 16*5.4"

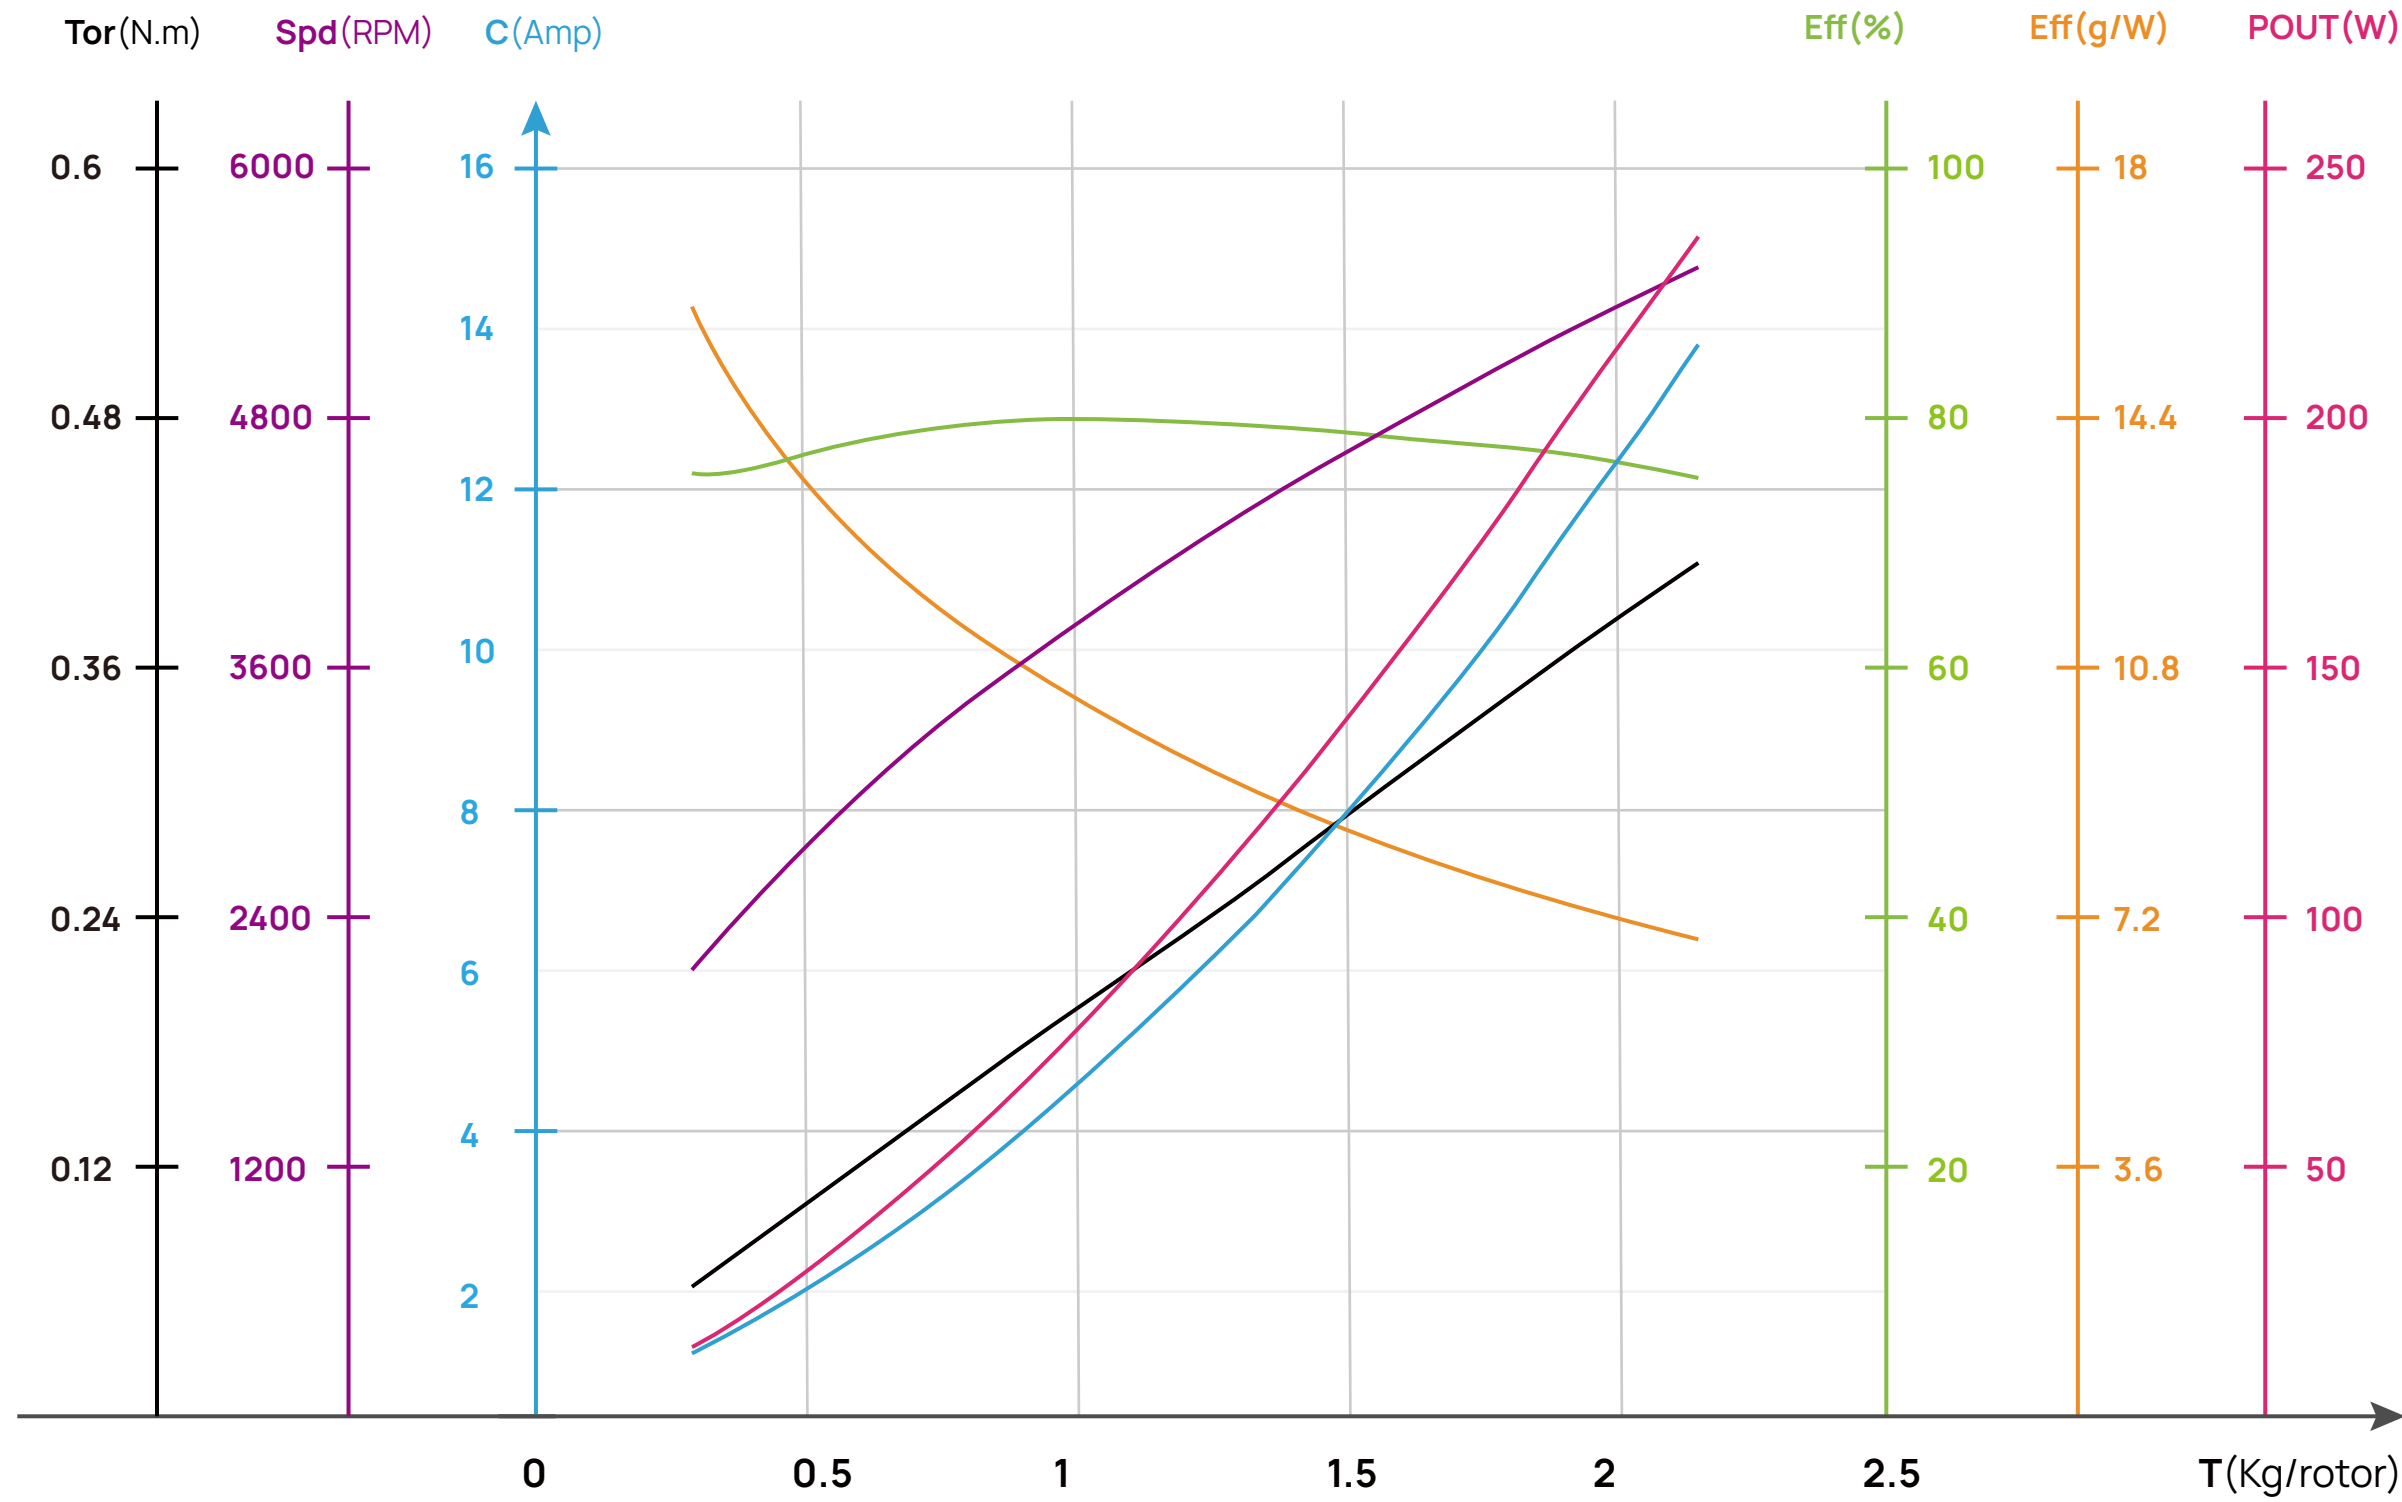

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 力效	Torque(N·m) 扭矩	Temperature(°C) 电机机壳温度
23V (6S LiPo)	MP 16*5.4"	33%	300	0.8	18.9	2163	15.8	0.06	57°C
		35%	329	0.9	21.3	2252	15.4	0.07	
		37%	361	1.0	24.1	2348	15.0	0.07	
		39%	398	1.2	27.4	2452	14.5	0.08	
		42%	458	1.4	33.0	2618	13.9	0.09	
		45%	527	1.7	39.8	2794	13.2	0.10	
		48%	601	2.1	47.6	2976	12.6	0.12	
		51%	681	2.5	56.5	3159	12.1	0.13	
		54%	766	2.9	66.4	3342	11.5	0.15	
		57%	853	3.4	77.3	3521	11.0	0.17	
		60%	944	3.9	89.0	3696	10.6	0.18	
		63%	1035	4.4	101.6	3864	10.2	0.20	
		66%	1127	5.0	115.0	4025	9.8	0.22	
		69%	1218	5.6	128.9	4179	9.4	0.23	
		72%	1308	6.2	143.5	4326	9.1	0.25	
		75%	1397	6.9	158.5	4466	8.8	0.27	
		78%	1484	7.6	173.9	4599	8.5	0.28	
		81%	1571	8.3	189.9	4726	8.3	0.30	
84%	1656	9.0	206.5	4849	8.0	0.32			
87%	1743	9.7	223.9	4971	7.8	0.33			
90%	1831	10.5	242.4	5092	7.6	0.35			
100%	2154	13.7	315.2	5516	6.8	0.41			

330KV+MP 17*5.8 "

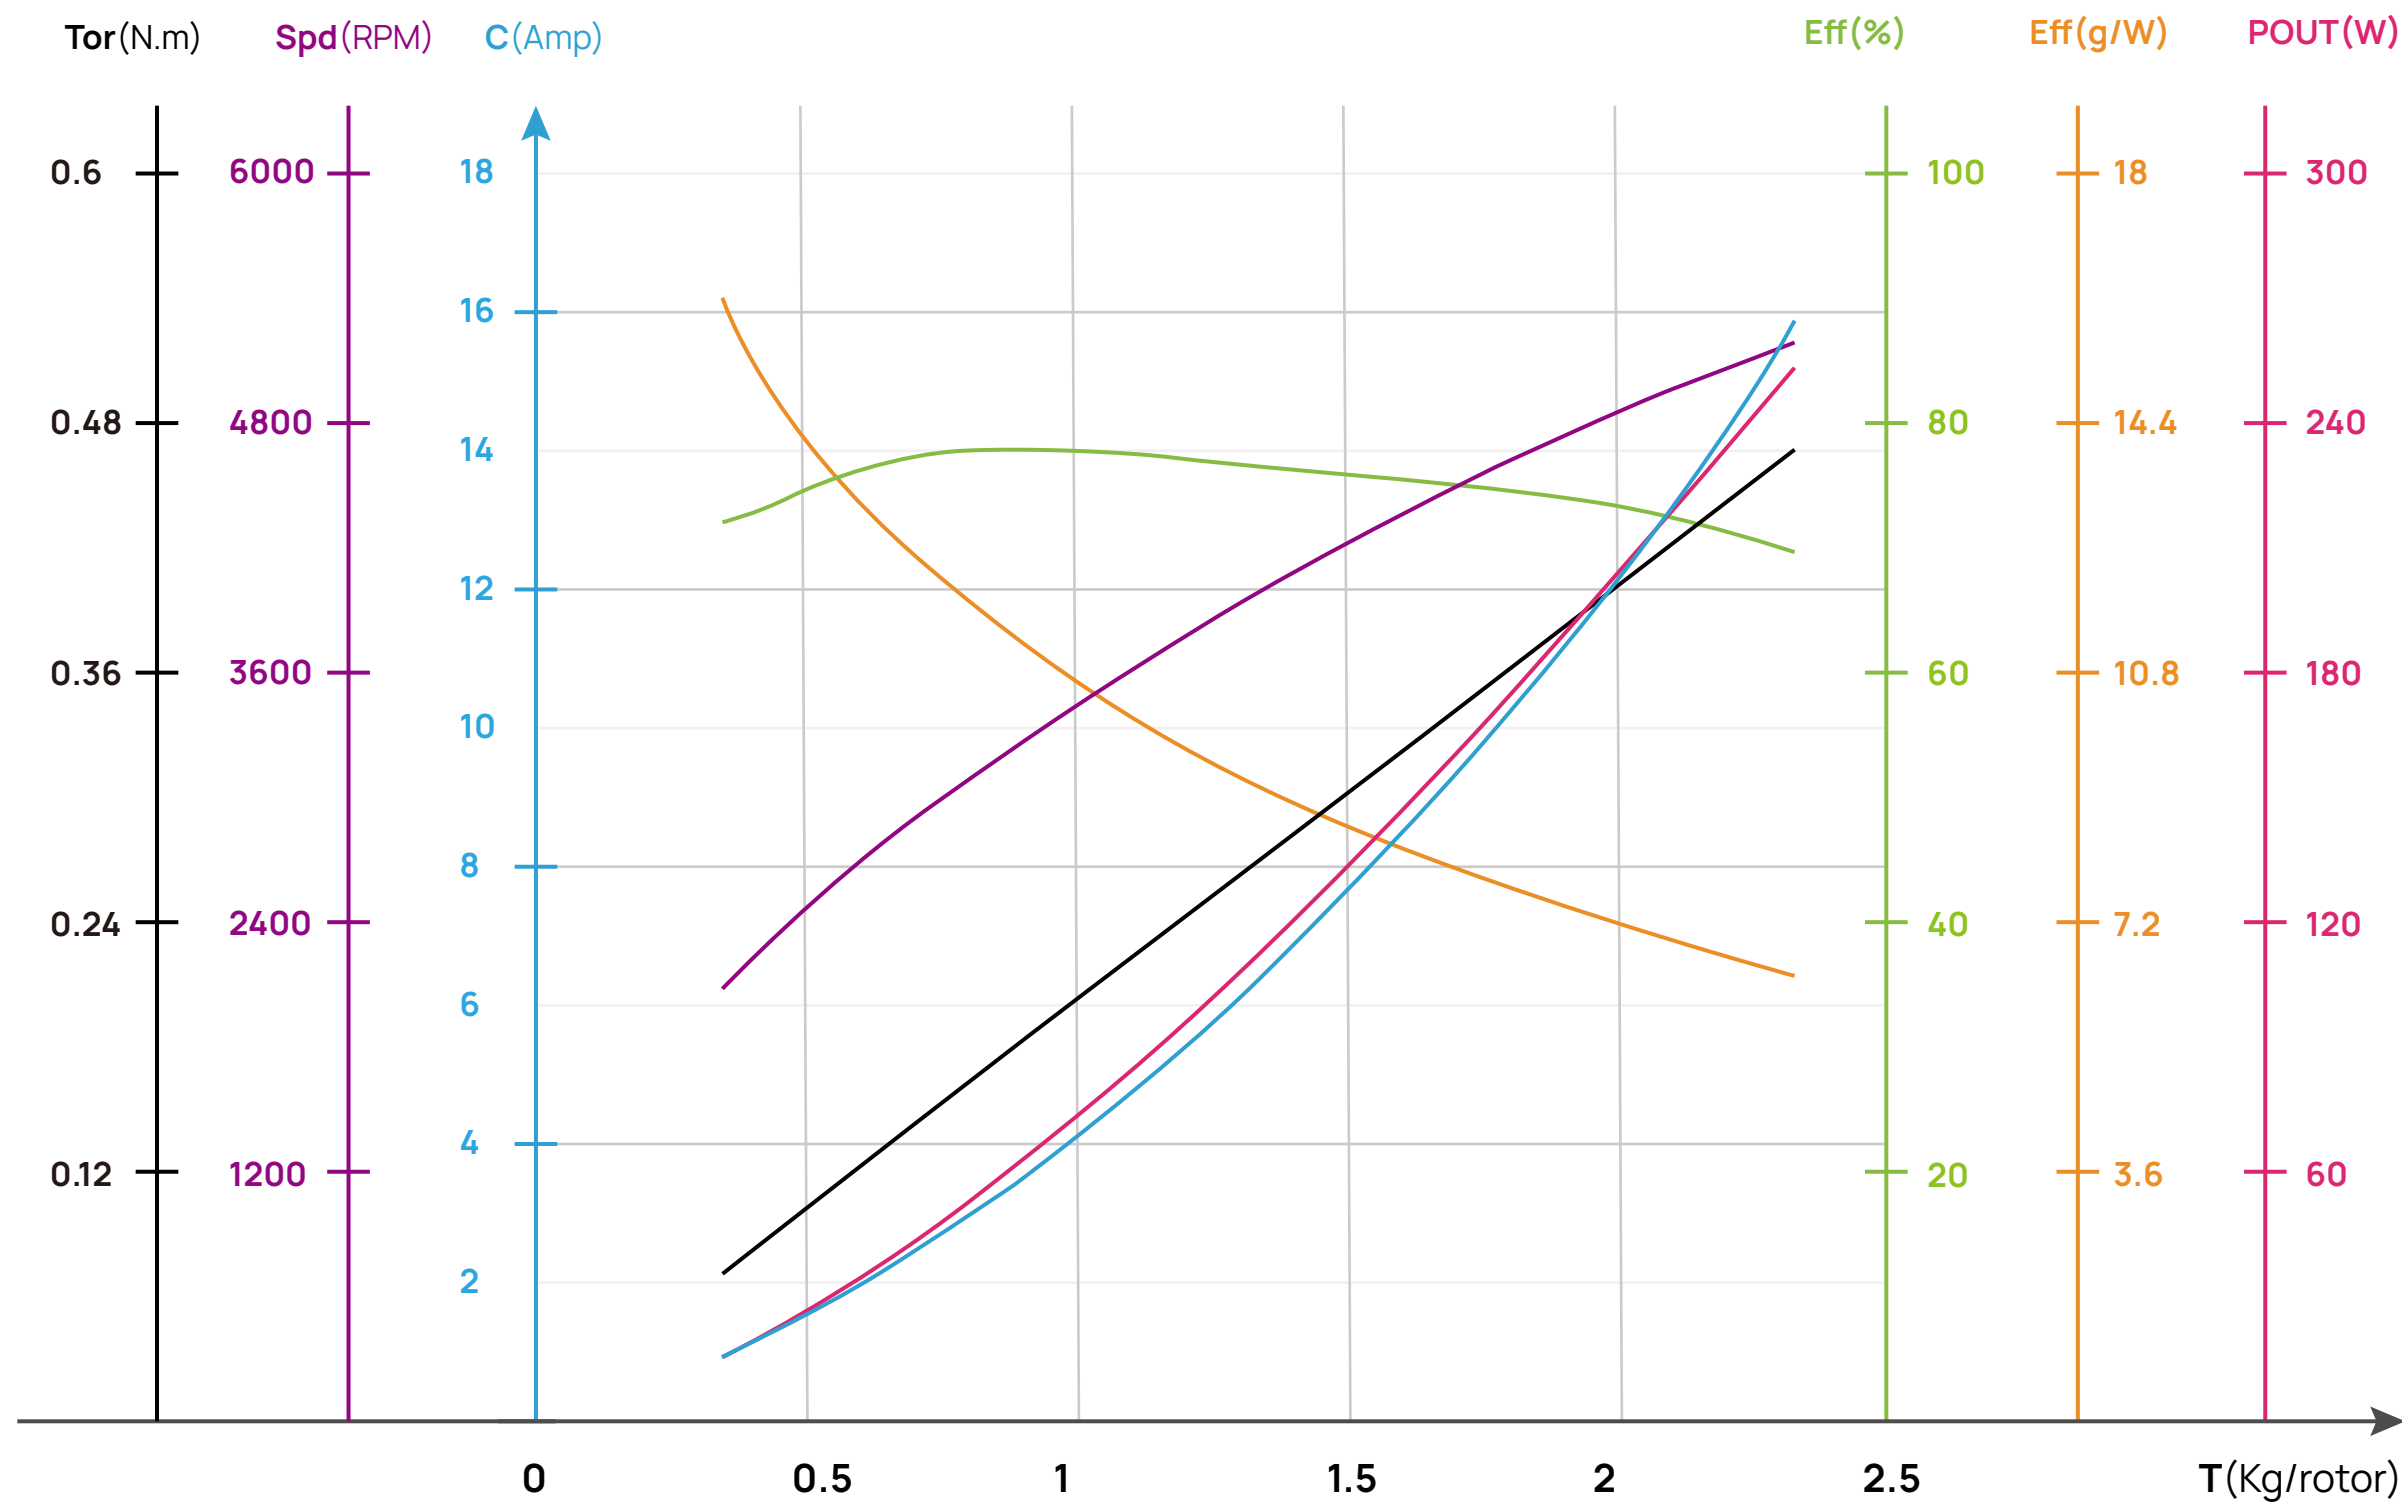

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 力效	Torque(N·m) 扭矩	Temperature(°C) 电机机壳温度
23V (6S LiPo)	MP 17*5.8 "	33%	356	1.0	22.3	2105	16.0	0.07	70°C
		35%	394	1.1	25.6	2205	15.4	0.08	
		37%	436	1.3	29.5	2311	14.8	0.09	
		39%	482	1.5	33.8	2423	14.3	0.10	
		42%	557	1.8	41.1	2594	13.6	0.11	
		45%	639	2.1	49.4	2767	12.9	0.13	
		48%	724	2.6	58.8	2938	12.3	0.15	
		51%	813	3.0	69.2	3105	11.7	0.17	
		54%	903	3.5	80.7	3268	11.2	0.18	
		57%	995	4.0	93.1	3426	10.7	0.20	
		60%	1086	4.6	106.4	3579	10.2	0.22	
		63%	1178	5.2	120.4	3726	9.8	0.24	
		66%	1269	5.9	135.1	3869	9.4	0.26	
		69%	1360	6.5	150.3	4006	9.0	0.27	
		72%	1450	7.2	166.1	4138	8.7	0.29	
		75%	1539	7.9	182.5	4265	8.4	0.31	
		78%	1629	8.7	199.5	4388	8.2	0.33	
		81%	1719	9.4	217.2	4506	7.9	0.34	
		84%	1809	10.3	235.8	4620	7.7	0.36	
		87%	1902	11.1	255.6	4731	7.4	0.38	
90%	1997	12.1	277.0	4840	7.2	0.40			
100%	2331	15.8	363.6	5177	6.4	0.47			