




LOAD PERFORMANCE PARAMETERS

负载性能参数

以下数据为好盈实验室于室温 25°C、海平面高度，变化油门输入调节测得，电机温度为推荐拉力下持续运行5min数据，仅供参考。


The following data is based on the measurement made by Hobbywing Laboratory at room temperature 25°C, sea level altitude, varying throttle input regulation, and the temperature of the motor is recommend take off weight under continuous operation for 5 mins, which is for reference only.

P65V & 60×20"

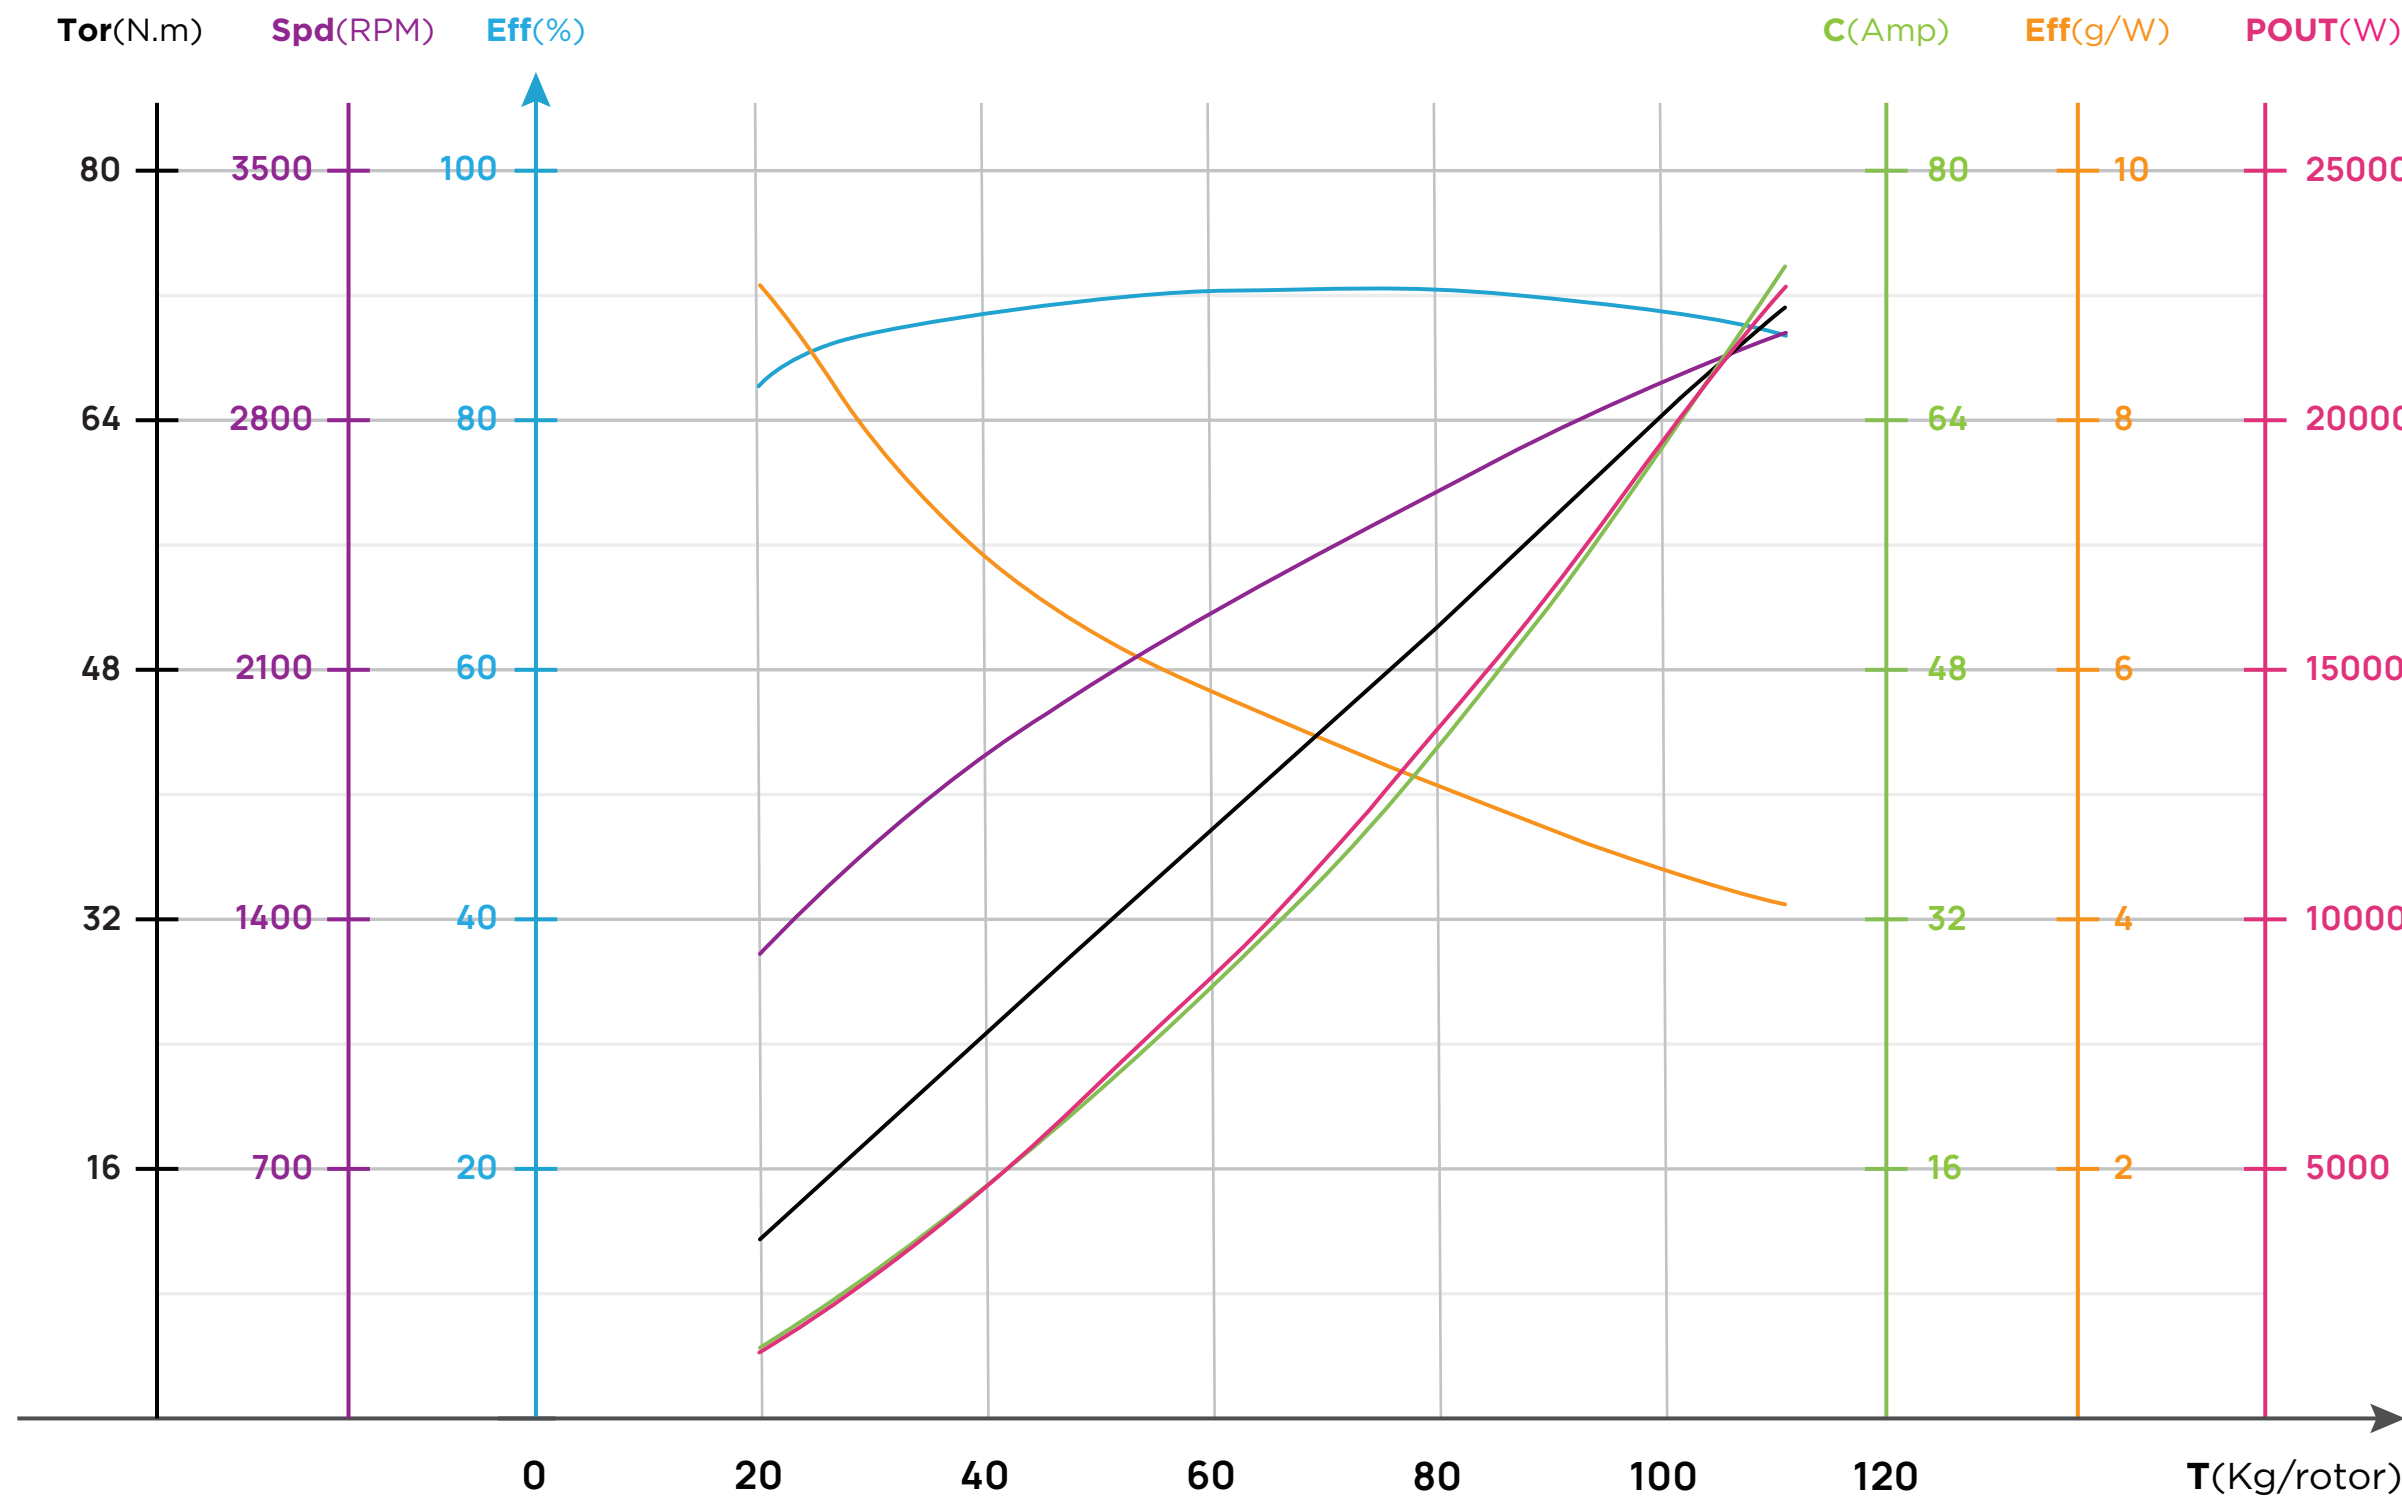

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 力效	Torque(N·m) 扭矩	Temperature(°C) 电机机壳温度
355V	60×20"	33%	21960	7.0	2488.6	1410	8.8	14.18	78°C
		35%	24258	8.0	2843.6	1481	8.5	15.62	
		37%	28343	10.0	3532.3	1598	8.0	18.24	
		39%	30049	10.8	3841.1	1644	7.8	19.36	
		42%	36257	14.2	5030.4	1800	7.2	23.44	
		45%	41769	17.4	6159.3	1925	6.8	27.04	
		48%	46426	20.1	7149.7	2023	6.5	30.04	
		51%	52027	23.6	8381.6	2133	6.2	33.59	
		54%	57589	27.2	9656.0	2236	6.0	37.08	
		57%	63967	31.6	11200.3	2348	5.7	41.05	
		60%	68423	34.8	12336.3	2424	5.6	43.85	
		63%	73633	38.7	13745.6	2510	5.4	47.16	
		66%	80308	44.2	15683.9	2618	5.1	51.50	
		69%	84300	47.7	16926.4	2681	5.0	54.16	
		72%	88133	51.2	18172.5	2740	4.9	56.75	
		75%	93887	56.7	20142.7	2826	4.7	60.66	
		78%	97841	60.7	21555.6	2883	4.5	63.33	
		81%	100271	63.2	22439.6	2916	4.5	64.95	
		84%	104054	67.1	23834.7	2966	4.4	67.39	
		86%	105899	69.1	24519.9	2989	4.3	68.54	
89%	108147	71.4	25347.0	3016	4.3	69.87			
100%	110240	73.6	26113.8	3039	4.2	71.05			

P65V & 54×23"

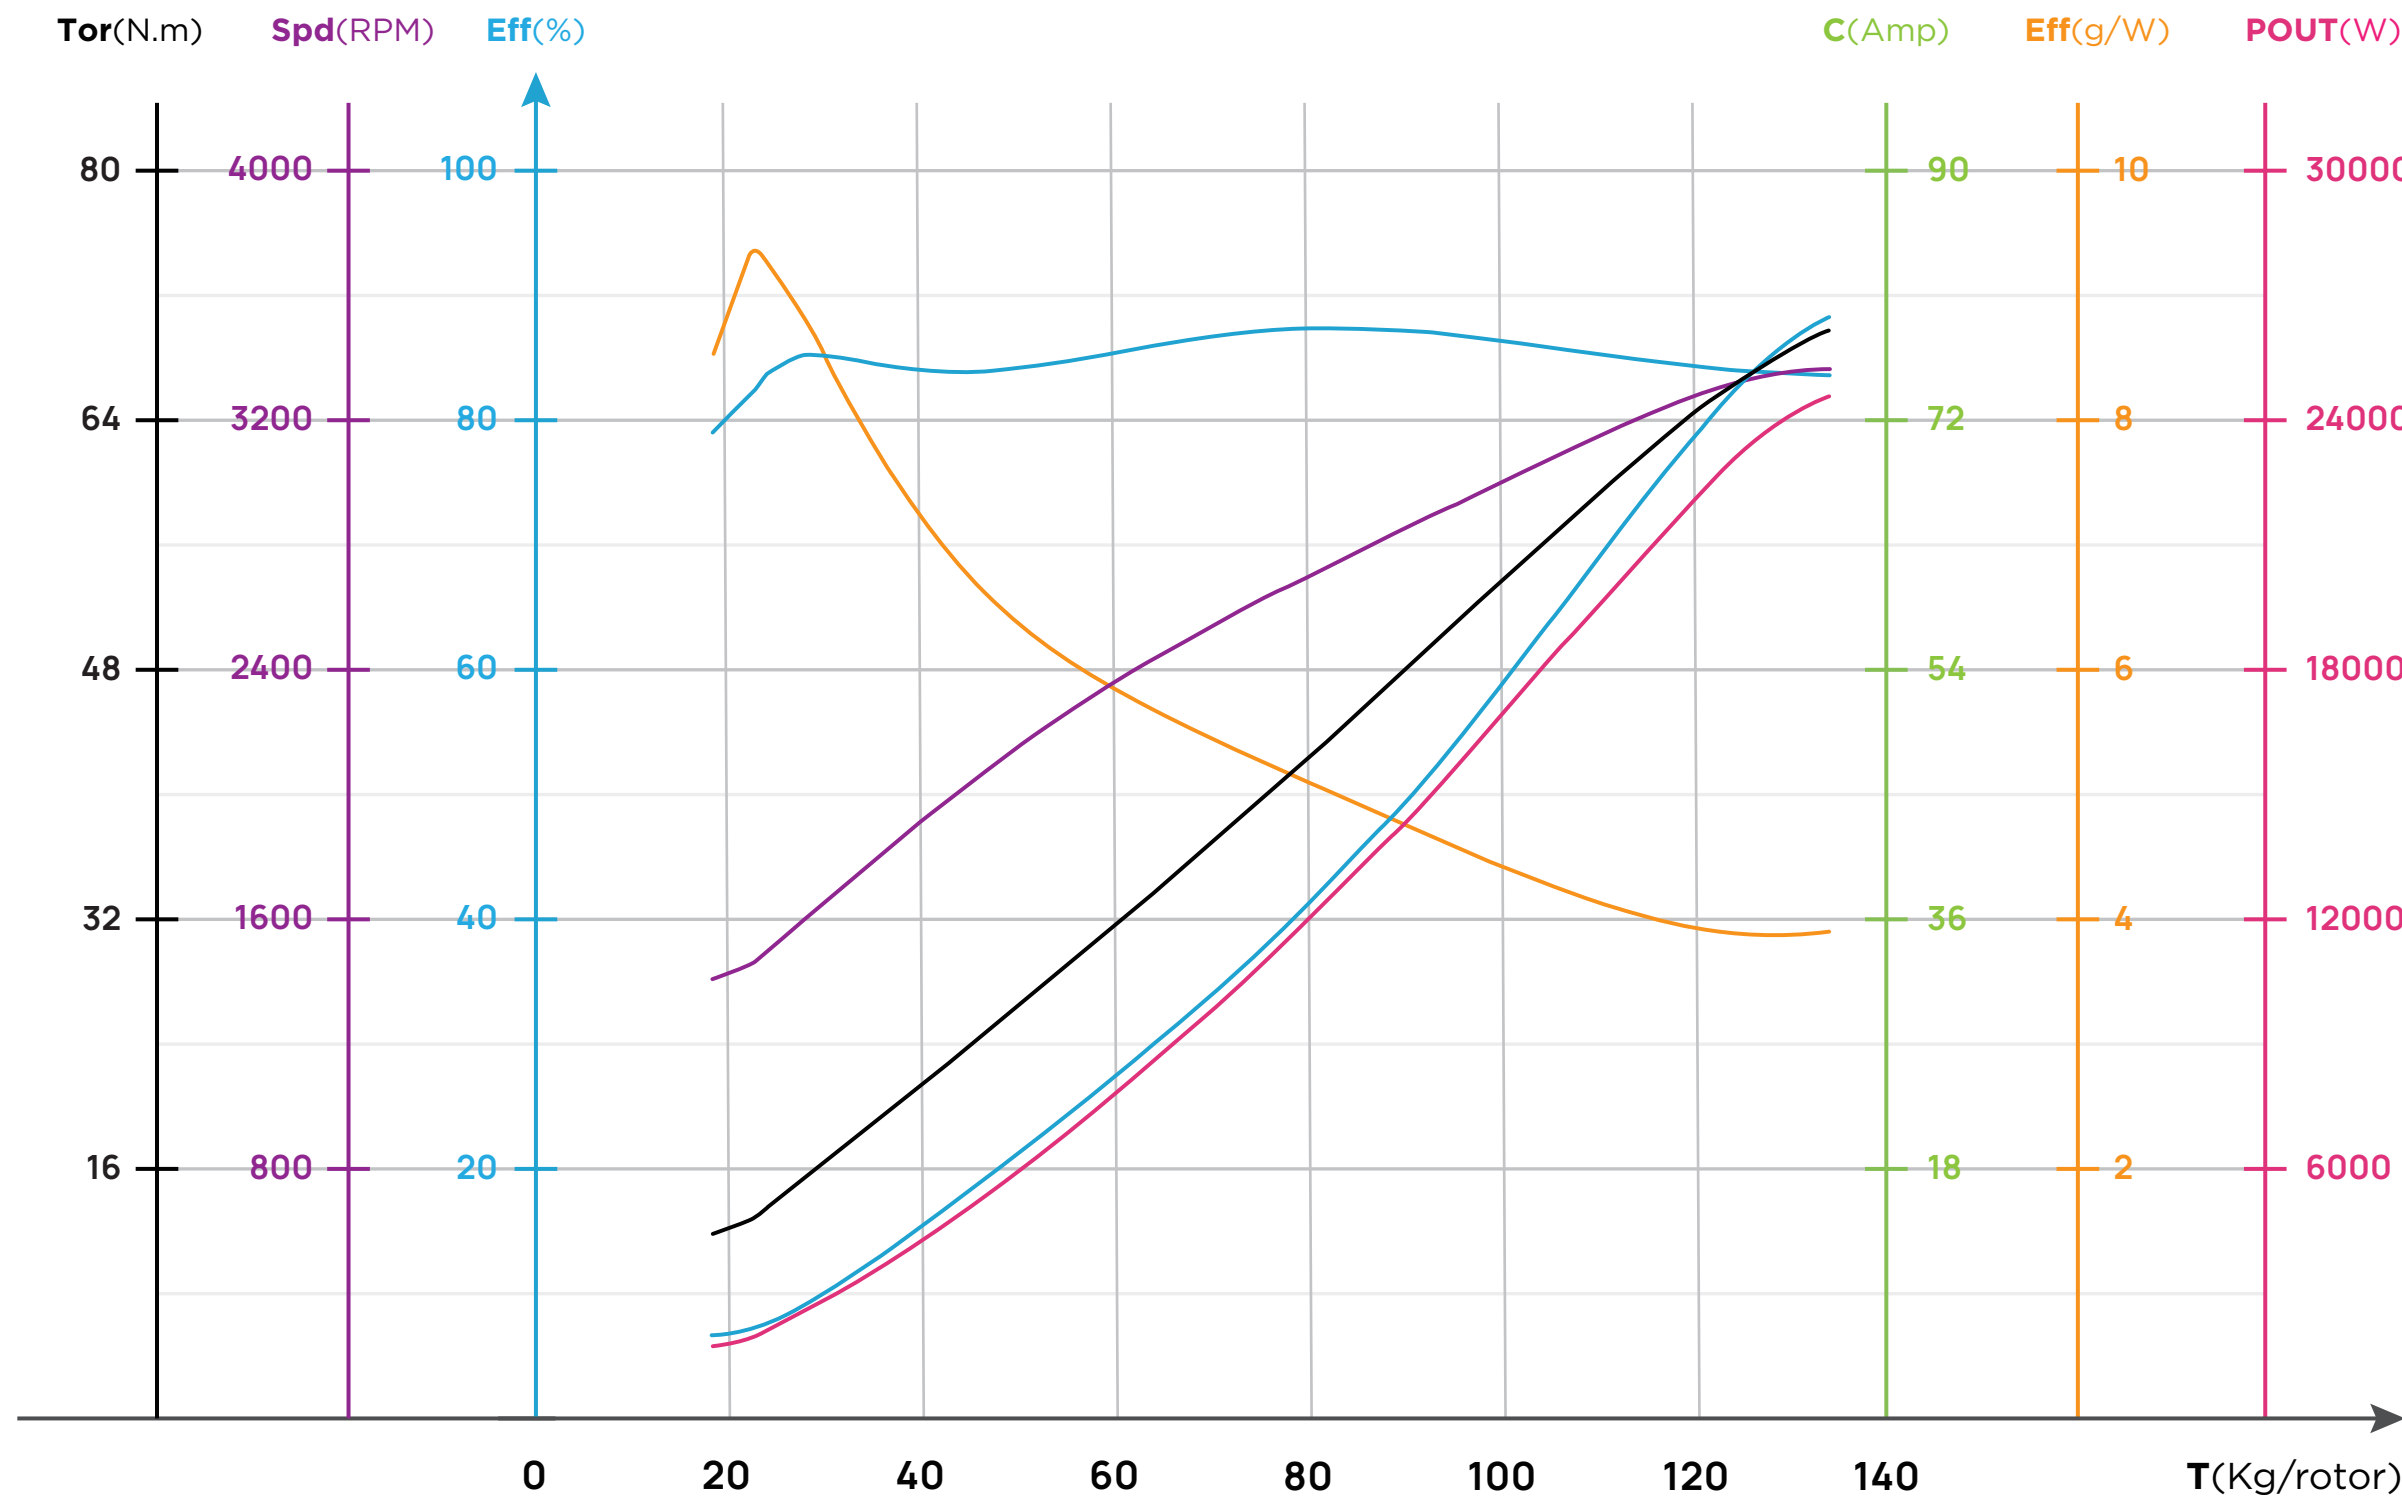

Voltage (V) 工作电压	Propeller 螺旋桨	Throttle (%) 油门	Thrust (g) 拉力	Current (A) 电流	Power (W) 输入功率	Speed (RPM) 转速	Efficiency (g/W) 力效	Torque (N·m) 扭矩	Temperature (°C) 电机机壳温度
370V	54×23"	35%	18756	5.9	2197.8	1409	9.3	11.77	78°C
		37%	23684	6.9	2567.8	1507	9.2	13.65	
		39%	26310	8.0	2967.4	1589	8.9	15.18	
		42%	31835	10.9	4018.2	1763	7.9	18.43	
		45%	37555	14.3	5283.6	1940	7.1	21.84	
		48%	44281	18.6	6882.0	2132	6.4	25.92	
		51%	49985	22.4	8284.3	2280	6.0	29.44	
		54%	55584	26.2	9697.7	2411	5.7	32.96	
		57%	60157	29.5	10896.5	2509	5.5	35.89	
		60%	66428	34.2	12646.6	2634	5.3	39.99	
		63%	71706	38.5	14248.7	2732	5.0	43.53	
		66%	76053	42.4	15673.2	2812	4.9	46.49	
		69%	82086	48.2	17826.6	2920	4.6	50.65	
		72%	86362	52.6	19469.4	2997	4.4	53.59	
		75%	92276	59.1	21852.2	3103	4.2	57.61	
		78%	96408	63.7	23550.5	3173	4.1	60.32	
		81%	101944	69.6	25752.0	3260	4.0	63.73	
87%	110051	76.8	28430.8	3348	3.9	67.96			
89%	112087	78.2	28915.5	3359	3.9	68.83			
95%	113933	79.1	29259.6	3362	3.9	69.52			
100%	114743	79.4	29381.7	3362	3.9	69.79			